

Tank to tank NOVEC 1230™ transfer unit

THB/52 – 1230 model




Description


The unit is designed for transferring the Novec 1230™ Clean Agent from one tank to another or from tank to extinguishers and cylinders.

Able to reach very good performances, the THB/52 – 1230 consists of a steel frame on which a pneumatic pump is installed (see details on the back).

FLUID FLOW-RATE / PRESSURE

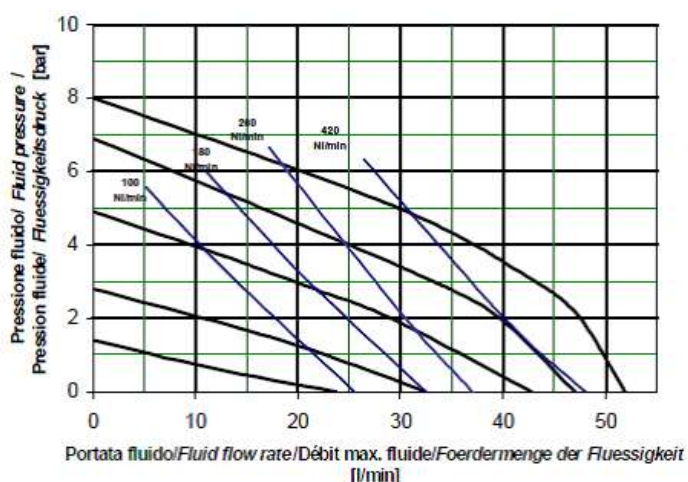

THB/52 – 1230 model

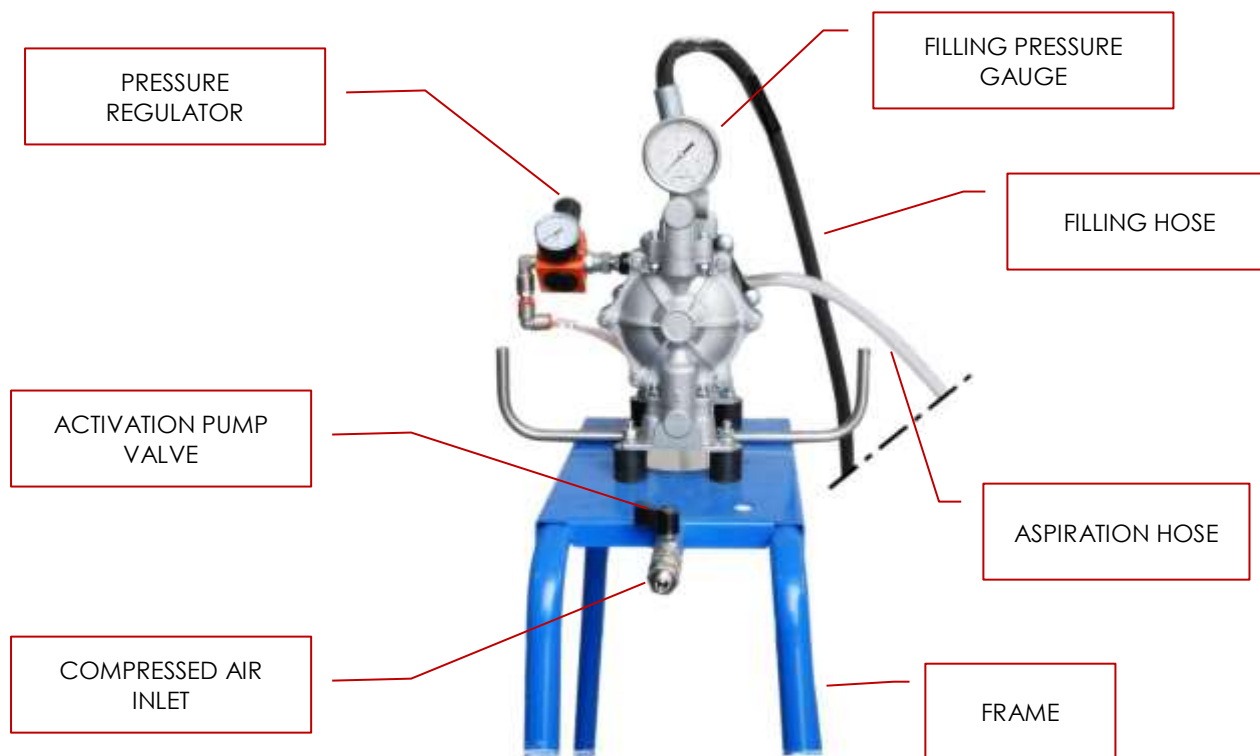

TECHNICAL SPECIFICATIONS

MAX AIR SUPPLY	6 bar
APPROX DIMENSIONS	650 x 550 x (h) 1100 mm
TOTAL WEIGHT	~ 60 kg
NOISE LEVEL	< 80 db
MAX FLOW-RATE	40 l/min
MAX FLUID PRESSURE	8 bar
FLUID TEMPERATURE	4 ÷ 60 °C
ΔP MAX	4 bar

> PER MAGGIORI INFORMAZIONI:
> FOR FURTHER INFORMATION CONTACT:
> POUR INFORMATIONS CONTACTER:

DAMOTEK S.r.l.

Via Avv. Giovanni Agnelli, 10 12033 MORETTA (CN) ITALY
Tel: +39 0172 911235
Fax: +39 0172 911322

www.damotek.com
info@damotek.com

